


i4400

6U VME64/VME64x PMC/PrPMC Carrier

The i4400 is a low-cost 6U form factor PMC / PrPMC carrier for the VMEbus and forms the basis of a flexible I/O system. It offers the user a means of integrating two single PMC modules or one double PMC module in a VMEbus system.

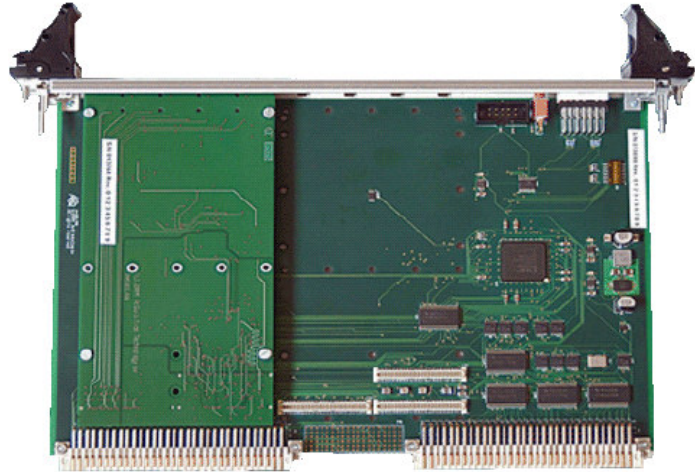

The VME-to-PCI bridge is implemented in an FPGA for flexible VME-to-PCI mapping and to allow future updates and upgrades. The base address of the i4400 is configurable by DIP-switches. The i4400 VME to PCI bridge is mapped in Standard (A24) I/O space of the VMEbus. Each PMC site has its own software configurable base address in Extended (A32) I/O space. The DIP-switches are accessible for configuration even when both modules are mounted.

The i4400 features flexible rear I/O in accordance with ANSI/VITA 35-2000. All 64 rear I/O signals from PMC site 1 are routed to VME P2. Using optional 5-row VMEbus connectors 46 rear I/O signals from PMC site 2 are routed to VME P2. Using the optional VME64x P0 connector all 64 rear I/O signals from PMC site 2 are available.

As an option the i4400 provides conduction cooling ribs in accordance with ANSI/VITA 20-2001. The interrupt controller on the i4400 has an interrupt vector register for each PCI-module. If a module is able to generate its own vector, the i4400 passes the interrupt request to the VMEbus. Interrupts for each PMC site can be masked separately. The level on which an interrupt is issued to the VMEbus, is software selectable.

On the front of the i4400 is a 7-segment display indicating the boot-status during FPGA boot sequence.

Features

- Conduction cooling (optional)
- VMEbus to PCI interface implemented in FPGA
- Selectable standard VMEbus addressing (A24) with byte
- (Even/odd) or word data transfers (D08(E/O)/D16/D32)
- Features 2 single or 1 double PMC
- 33 MHz/32-bit PCI interface to PMC modules
- 3.3V PCI signaling on PMCs
- Support for two ANSI/VITA 32-2003 compliant Processor PMCs
- Rear I/O on P2 or optional P0 connector
- Available in 3-row and 5-row VME with optional P0
- Software selectable interrupt level per module
- Thermal sensor for each PMC site
- Voltage monitoring and front panel status display

PCI bus Compliance

- Master and slave interface
- A32/A24/A16, D32/D16/D08(EO)
- Base address selectable via coding switch
- Auto slot 1 detection for system controller functions
- Internal arbiter when board is system controller
- Programmable D08(O) interrupt vector (vector unique per module)
- ANSI/VITA 35 compliant rear I/O routing on P2 connector, 64 signals for PMC module 1, 46 signals for PMC module 2 (with optional 160-pin VMEbus connectors)
- ANSI/VITA 35 compliant rear I/O routing on optional P0 connector, 64 signals for PMC module 2
- Occupies only one VMEbus slot

Connections

- P1 and P2 to VMEbus
- 96-pin VMEbus P2 to PMC site 1 P4 for user I/O
- 160-pin VMEbus P2 to PMC site 1 P4 plus PMC site 2 P4 for user I/O
- VMEbus P0 to PMC site 2 P4 for user I/O (optional)
- PMC site P1 and P2 for PCI interface

PMC Compliance

- 2 single or one double PMC module
- 33 MHz/32-bit PCI V3.0 compatible interface
- INTA / INTB / INTC / INTD supported
- Software programmable interrupt enable/disable per PMC module

- Software programmable interrupt level per PMC module
- P4 connector for rear I/O
- Optional ANSI/VITA 20 compliant conduction cooling ribs

Product Characteristics

- Standard double height board 160
- 233.35 mm
- Status display
- Reset switch
- Operating temperature -40°C--+85°C
- Voltage monitoring **Software** support:
- APIS platform support for OS-9
- Other platforms on request

Ordering Information

- **i4400/T01** i4400 Dual PMC Carrier, 96-pin, without P0 connector
- **i4400/T02** i4400 Dual PMC Carrier, 96-pin, with P0 connector
- **i4400/T03** i4400 Dual PMC Carrier, 160-pin, without P0 connector
- **i4400/T04** i4400 Dual PMC Carrier, 160-pin, with P0 connector
- **cci4400/T05** Conduction cooled i4400 Dual PMC Carrier, 96-pin, without P0 connector
- **cci4400/T06** Conduction cooled i4400 Dual PMC Carrier, 96-pin, with P0 connector
- **cci4400/T07** Conduction cooled i4400 Dual PMC Carrier, 160-pin, without P0 connector
- **cci4400/T08** Conduction cooled i4400 Dual PMC Carrier, 160-pin, with P0 connector
- **i4400/SW** APIS based software for i4400
- **i4400/MAN** i4400 manual on paper

Block Diagram

