


XTend4010

Nine-Slot VPX/CompactPCI Hybrid Backplane

- › Four VPX slots
- › Three CompactPCI peripheral slots
- › One PCI bridge/switch slot
- › x4 PCI-Express switch when used with the XChange3010
- › One redundant x2 switch slot
- › Redundant Gigabit Ethernet switches when used with the XChange3011
- › One optional development/debug I/O connector
- › One optional ATX power connector
- › Selectable +5V/+3.3V CompactPCI VIO Power
- › Any of the four VPX slots, or a PMC/XMC on the XChange3010 may be configured as system controller

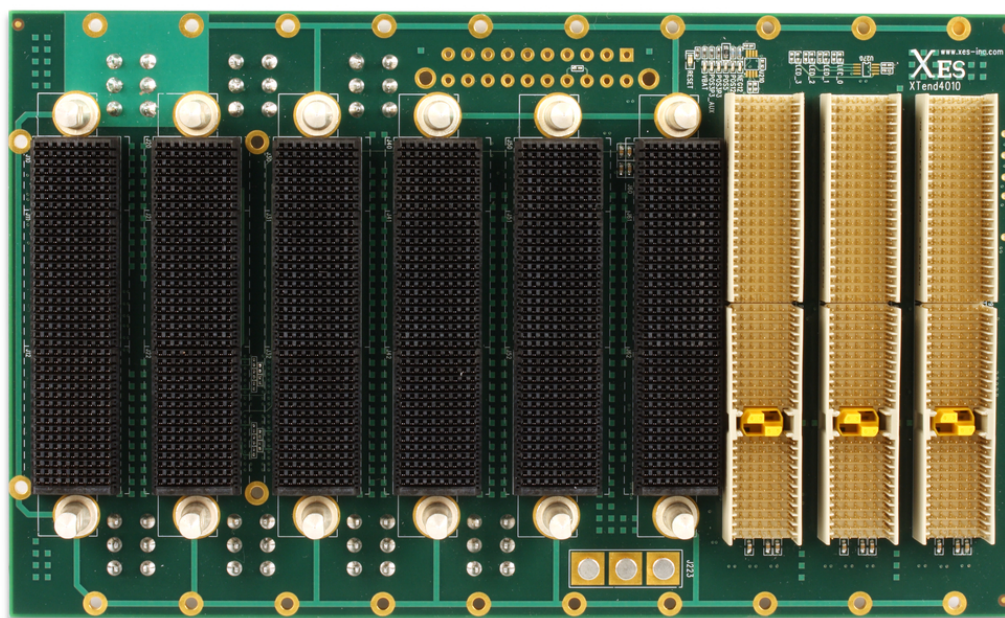

XTend4010

The XTend4010 3U hybrid system supports four VPX slots, three CompactPCI slots, a Gigabit Ethernet switch slot, and a fabric/bridge slot. System designers can take advantage of this feature by either using it as a development platform for migrating from CompactPCI to the VITA 46 (VPX) standard, or a fully deployable system capable of supporting legacy CompactPCI devices.

Four VPX slots are provided in this system. Each VPX slot has a direct connection to adjacent VPX slots, as well as the fabric/bridge slot. The fabric/bridge slot provides high-speed switching for the VPX backplane, as well as a PCI bridge to communicate with the CompactPCI bus segment.

Three 3U CompactPCI slots are provided. The PCI bus is capable of operating at 33 or 66 MHz and is 32 bits wide.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

VPX SLOTS

- Star fabric topology (A fabric)
- Ring fabric topology (B/C fabrics)
- Four x4 PCIe links when used with the XChange3010

COMPACT PCI

- Three CompactPCI peripheral slots
- 32-bit PCI bus
- 33-MHz or 66-MHz frequency operation

ETHERNET

- Two redundant Gigabit Ethernet switch fabrics provided when used with the XChange3011

SERIAL

- One serial port from each of the four VPX slots may be accessed in a rugged fashion via a front panel connector on the XChange3011

XIT4010 DEBUG CARD

- One USB port from each of the four VPX slots may be accessed via an XIt4010 debug card
- One serial port from each of the four VPX slots may be accessed via an XIt4010 debug card
- One Gigabit Ethernet port providing access to each to the two Gigabit Ethernet fabrics may be accessed via an XIt4010 debug card

ENVIRONMENTAL REQUIREMENTS

- Operating temperature: -40 to 85 °C
- Humidity: 0% to 85%
- Storage temperature: -40 to 125 °C

POWER REQUIREMENTS

- Power requirements depend on the requirements of the system as a whole

